




Model : PST4050


Power Screen Tensioner

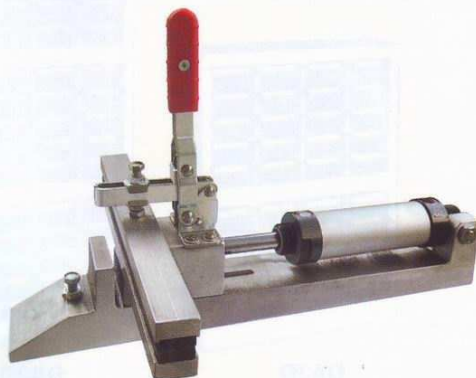

Screen Pinching Width	300mm
Air Pressure Supply	4 to 9kg / cm ²
Cylinder Bore	40mm
Tension Stroke	50mm
Dimension (mm)	300(W) x 475(L) x 280(H)
Weight	3.9kg

Rubber Cushion Spindle

(Complete with 2 Hexagon Nuts)



unit : mm

Part No.	Size	L	Weight
FC-042707	M4 x 0.7	27mm	4g
FC-044007	M4 x 0.7	40 mm	6g
FC-053508	M5 x 0.8	35 mm	8.5g
FC-084312	M8 x 1.25	43 mm	28.2g
FC-12400	BSW 1/2 - 12	4"	148g
FC-14134	BSW 1/4 - 20	1 3/4"	18.2g
FC-14200	BSW 1/4 - 20	2"	19.2g
FC-38334	BSW 3/8 - 16	3 3/4"	65g
FC-38412	BSW 3/8 - 16	4 1/2"	73g
FC-56212	BSW 5/16 - 18	2 1/2"	35g
FC-56300	BSW 5/16 - 18	3"	35.8g

Flanged Washer



unit : mm


Part No.	D x K x W	To Suit Toggle Clamp	W
FW-043084	4.3 x 3.7 x 8.4	H225	1.2g
FW-051090	5.1 x 3.5 x 9	V105, H301, V150, V209, V209B, H430, H430B, H209, H209B	1.7g
FW-064100	6.4 x 4.7 x 10	H313	1.9g
FW-064120	6.4 x 4 x 12	V108, H235, H235B, H238, H440, H440B	2.2g
FW-064138	6.4 x 4 x 13.8	V120, V120B	2.4g
FW-065150	6.5 x 6.5 x 15	H380, H380B, V141, V141B, V125	6.4g
FW-085150	8.5 x 6.5 x 15	V101, V110L, V110L1, V130, V160, V130L, V142, V142B, H230, H230L, H230F, H230FL, H245, H245B, H450, H450B, H228F, H228FA	5.8g
FW-085207	8.5 x 6.5 x 20.7	H381, H381B	10g
FW-105215	10.5 x 7.5 x 21.5	V210, V210B, V170, H300, H300L, H300H, H300HL, H330, H460, H460B, H330L, H381H, H384, H384B, H520L, H550L	10g
FW-130245	13 x 7.5 x 24.5	V247U, V247UB, V310	19.5g



Model	A	B	C	H	T	Weight
1. RF25T150RD	150	126	65	29	2.5	249g
2. RF30T150RD	150	126	65	29	3.0	448g
3. RF40T170RD	167	135	76	39	4.0	831g
4. RF30T190RD	190	135	110	27	3.0	780g

Mat'l : M.S

Coating : NIL

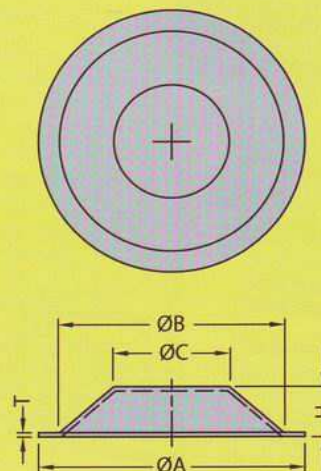

unit : mm




SQB-TYPE



SQA-TYPE




SQB-TYPE

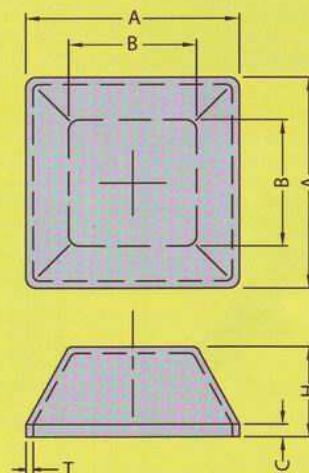

unit : mm

SQA-TYPE

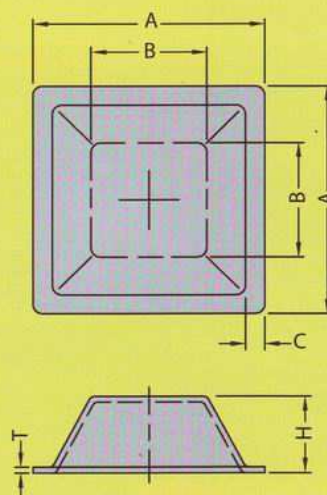

unit : mm

Model	A	B	C	H	T	Weight
1. RF30120SQA40	120	60	10	40	3.0	437g
2. RF40120SQA40	120	60	10	40	4.0	584g
3. RF40120SQB50	120	55	30	50	4.0	743g
4. RF40125SQA50	125	72	10	50	4.0	731g
5. RF45130SQA45	130	87	10	45	4.5	854g
6. RF40100SQB50	100	72	10	50	4.0	587g
7. RF40114SQA48	114	72	4	48	4.0	587g
8. RF30100SQA35	100	41	10	35	3.0	320g
9. RF30085SQB35	85	41	3	35	3.0	253g

Mat'l : M.S

Coating : NIL

MACHINE MOUNT & LEVEL ADJUSTER



JSCLAMP
HIGH QUALITY TOGGLE CLAMP

Machine Mount

JS High Performance Rubber


- Tensile strength 25 MPa
- Elongation at break max 900%
- Max temperature dry atmosphere 120°C
- Cold resistance -40°C
- Resistance to permanent set
- Abrasion resistance
- Tear resistance
- Rebound
- Resistance to oil and gasoline
- Resistance to hydrolysis, dilute alkali
- Resistance to gas permeability



Model	ØA	Adjustable Height (mm)	Bolt Thread Length (mm)	H1	H2	Capacity	Weight
1. MM-100-70	100	38 - 56	M12 x 120	31	44	350kg	0.85kg
2. MM-140-70	140	45 - 65	M18 x 120	38	48	1000kg	2.00kg
3. MM-190-70	190	55 - 77	M24 x 180	41	60	2000kg	4.60kg
4. MM-250-70	250	74 - 109	M30 x 150	63	77	3500kg	10.5kg

Machine Mount

- (1) Screw Bolt
- (2) Locking Nut
- (3) Washer
- (4) Machine
- (5) Nitrile Rubber Pad
- (6) Support Housing
- (7) Bearing Plate

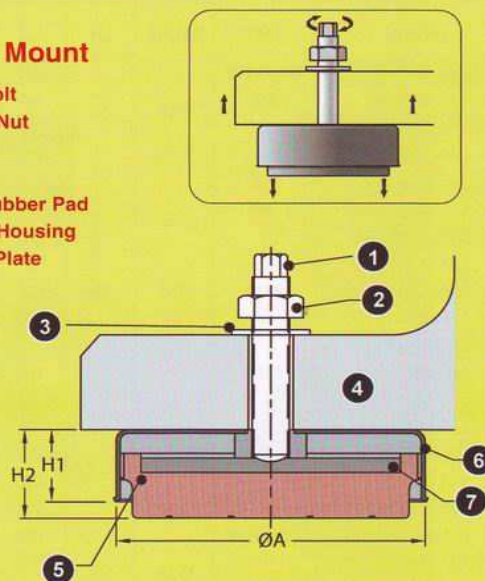

unit : mm

Model : LA-1 (M8 x 33L) LA-1 (M10 x 33L)


*Also available in Stainless Steel



Static Load : 90kg MAX


Weight : 27g/38.5g

Level Adjuster

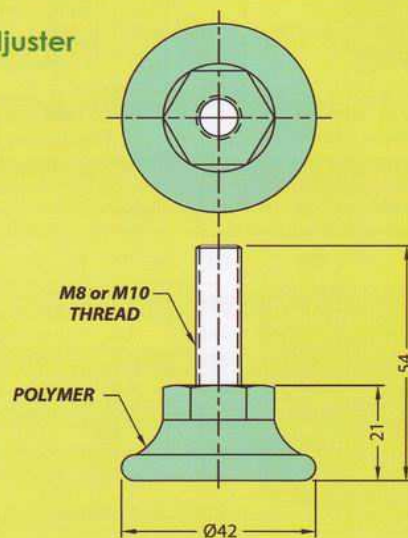

unit : mm

Level Adjuster

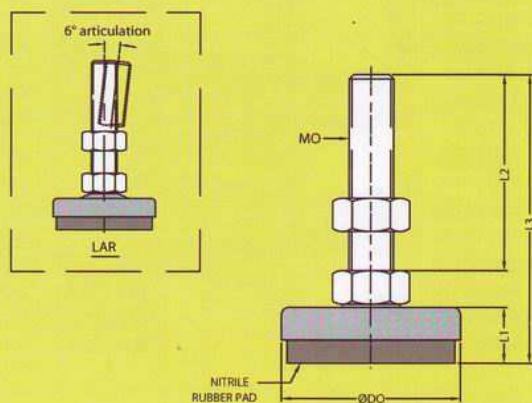

unit : mm

*Also available in Stainless Steel



Model	MO	ØDO	L1	L2	L3	Weight	Static Load (kg)
1. LA-3	M8 or M10	Ø40	13	50	70	80g	200kg
2. LA-3	M12	Ø40	13	70	90	107g	200kg
3. LA-4	M16	Ø60	18	70	100	320g	500kg
4. LA-5	M20	Ø80	26	83	126	551g	700kg
5. LAR-5	M16 or M20	Ø80	26	83	126	551g	700kg



LEVELING MOUNT & LEVELING FEET

Model	MO	ØDO	L1	L2	Weight	Static Load (kg)
1. LM-45B3860	3/8 BSW	Ø45	14	60	73.8g	200
2. LM-45M860	M8			60	57g	
3. LM-45M1060	M10			60	68g	
4. LM-45M1260	M12			60	105g	
5. LM-60M880	M8	Ø60	16	80	101g	350
6. LM-60M8100				100	106g	
7. LM-60M8120				120	113g	
8. LM-60M1080				80	121g	
9. LM-60M10100	M10	Ø60	16	100	132g	350
10. LM-60M10120				120	141g	
11. LM-60M1280				80	154g	
12. LM-60M12100				100	165g	
13. LM-60M12120	M12	Ø60	16	120	182g	350
14. LM-75B1275*				75	200g	
15. LM-75B12100*				100	217g	
16. LM-75B12150*				150	254g	
17. LM-75B5875*	5/8 BSW	Ø75	20	75	274g	500
18. LM-75B58100*				100	299g	
19. LM-75B58150*				150	365g	
20. LM-75M1275*				75	185g	
21. LM-75M12100*	M12	Ø75	20	100	201g	500
22. LM-75M12150*				150	236g	
23. LM-75M1675*				75	255g	
24. LM-75M16100*				100	287g	
25. LM-75M16150*	M16			150	353g	


Also available in Stainless Steel
*LML (Long Base) Available

Static load has been tested and verified by lab.

Mat'l : M.S

Coating : BZ

Leveling Mount

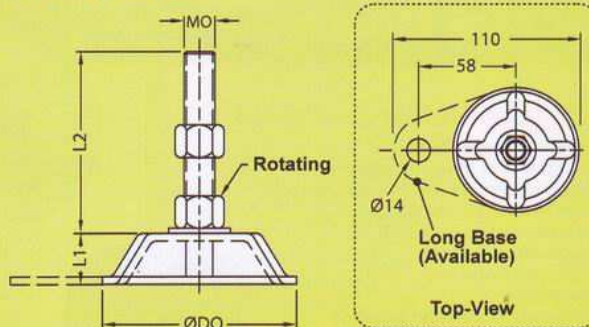

Ordering model (example):

LML - 75M16150

Long Base ØDO Mo L2



LML (Long base)




LM


unit : mm

Model	ØD	ØE	T	C	ØP	Weight
1. RBP-45	Ø45	Ø51	3.5	-	-	13g
2. RBP-60	Ø60	Ø66	3.5	-	-	20g
3. RBP-75	Ø75	Ø81	3.5	-	-	33g
4. RBP-80	Ø80	Ø86	4.5	65	Ø8.5	48g
5. RBP-100	Ø100	Ø107	5.0	79	Ø10.5	84g

Rubber Pad

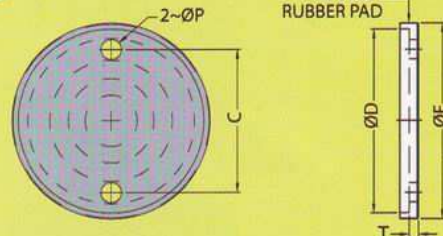

Leveling Feet

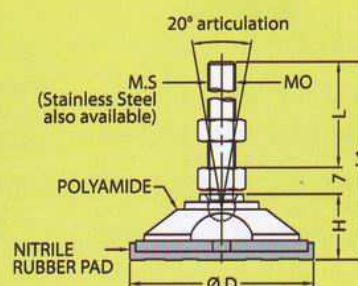

unit : mm

Also available in Stainless Steel

JS Leveling Feet can be used to level electronic racks, machine tools, benches, etc. The polyamide offer good impact resistance, high strength & good resistance to many organic acids, alkaline, chemical, salt, etc.